VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925

















Publisher: Master Journals



Journal Website: https://masterjournals. com/index.php/crjps

Copyright: Original content from this work may be used under the terms of the creative commons attributes 4.0 licence.



Research Article

COMPARATIVE STUDY OF P&O AND INCREMENTAL CONDUCTANCE METHOD FOR PV SYSTEM BASED ON THEVENIN EQUIVALENT **CIRCUIT MODEL**

Submission Date: October 5, 2022, Accepted Date: October 7, 2022,

Published Date: October 8, 2022

Crossref doi: https://doi.org/10.37547/philological-crips-03-10-01

Ali Haider Dahash

Al-Nahrain University College of Engineering Electronic and Communications Engineering Iraq. **Anas Lateef Mahmood**

Al-Nahrain University College of Engineering Electronic and Communications Engineering Iraq.

ABSTRACT

For maximum power point tracking (MPPT) and power grid investigations, a photovoltaic (PV) source model is required. Environment Temperature, solar irradiation, and load (RL) all have an impact on the output power of (PV) arrays with nonlinear properties. To optimize the provided possible power, for photovoltaic (PV) power systems, numerous maximum power point tracking (MPPT) strategies have been researched and developed. Thevenin's equivalent model for a (PV) source is designed by piecewise linearization of the diode characteristic. Thevenin model is compared by using different MPPT algorithm methods perturb and observe (P&O) and Incremental conductance (INC) using MATLAB simulation program. The simulated PV system consist of (PV panels, DC-DC boost converter, and MPPT controller) and the comparison between the two MPPT algorithm methods (P&O and INC) to maximize the obtained solar power. The simulation results showed that Thevenin's equivalent model of (PV) produces a voltage-current characteristic which represents the PV source operation fairly well.

KEYWORDS

Photovoltaic (PV), Maximum Power Point Tracking (MPPT), Perturb and Observe (P&O), Incremental Conductance (IC).

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925

















Publisher: Master Journals

INTRODUCTION

Renewable energy sources are a hot topic that is gaining traction around the world due to the consumption expiration of fossil fuels [1]. One of the most important renewable energy sources is solar energy. Solar energy inexhaustible, and free, as opposed to conventional unrenewable resources such as gasoline, coal, etc..., [2]. In this context, international efforts have been made to promote the use of more renewable energy resources, one of which is solar photovoltaic, which is one of the most promising clean energy sources for global energy consumption. Approximately 90% of solar deployed systems across the world are grid-connected [3]. A PV cell, also known as a solar cell, is the most basic component of a photovoltaic PV power system [4]. Photovoltaics PV way of converting light into electricity using commonly semiconductor, silicon [5]. Figure 1.1 shows Solar PV power production capacity on a global capacity

[6]. The electrical energy that we get from solar panels is affected by several conditions such as temperature, the intensity of lighting, semiconductor material ... etc. So to improve solar energy production operators can't modify solar panel's material most of the time, but they can use MPPT techniques to adjust solar panel's power from sunlight intensity. As a result, MPPT techniques play a significant role in improving solar cell energy generation [7]. Therefore, the tracking of the maximum power point of the photovoltaic array is known as maximum power point tracker MPPT, where MPPT can be defined, which is an electrical circuit through which it is possible to control effective resistance to the load that you see PV array, and thus we can control the maximum point of the characteristic I-V characteristic at which system operates [8]. Figures 1 and 2 shows characteristics of PV array under the typical temperature T and radiation G conditions (G=1000W/m2, $T=2S^{\circ}C$). Due to nonlinear PV array

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925

















Publisher: Master Journals

properties, and additionally, the PV array only makes use of its maximum power at one location, therefore there must.




Figure 1 PV array I-V characteristic [9]




Figure 2 PV array P-V characteristic [9]

1.1 Types of PV models

A. PV array model [10]

The one-diode model, two-diode model, four-parameter model, and so on is the most often used PV cell models. They can be used for a variety of purposes [10]. The electrical equivalent circuit for the single diode PV model is shown in figure 3, and the electrical

equivalent circuit for the two diode as shown in shown in figure 4.




Figure 3 The single-diode PV model's electrical circuit [11]




Figure 4 The double-diode PV models electrical circuit [11]

B. Thevenin's equivalent model [12]

The Thevenin equivalent model can be used to make simple the photovoltaic (PV) model [12]. Because the models are shown in the figures 3 and 4 are non-linear, linearization can be used to represent any nonlinear system as a linearized model with variable parameters. A PV model shown in figure 3 they can be now represented by Thevenin's

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925

















Publisher: Master Journals

equivalent resistance and voltage are depicted in the illustration 5 [13], [14].




Figure 5 Thevenin's PV source for equivalent model [12]

2. Maximum Power Point Tracking (MPPT) Methods and Algorithms [16]

Tracking to maximum available power at PV array output is a common PV energy generation issue. In this regard, Numerous solutions to this issue have been proposed in the literature. Techniques, standards. limits. and applications change for each method. Since a PV cell's I-V nonlinear, tracking curve is the MPP requires an algorithm. A PV array works maximum at voltage and maximum (VMPP), (IMPP) current respectively, MPPT is occur. MPPT is fundamentally affected by irradiation and temperature [18]. Due to its simplicity and minimal computational resource requirements, the Perturb & Observe (P&O) method is an example of this; this is one of the most commonly used MPPT flowchart. [19], [20]. On the other hand, has drawback of being confused and resulting in MPP tracking in wrong direction during rapidly changing irradiance. Similarly, Incremental Conductance (INC) method is based on a slope analysis of the PV generator's P-V curve [21 - 25].

2.1 Perturb and Observe (P&O) Method [16]

P&O approach is implemented by following the procedures shown figure 6. by using the output of the PV model the voltage and current measured subsequently, In order to perturb the voltage and make a comparison with an earlier operating point, the operating point (actual power point and voltage point) is computed (preceding power point and voltage point), this method of calculating the slope value of dP/dV. The perturbation is known to have moved the array's operating point nearer the MPP by using the slope value, and the algorithm will continue to perturb the PV array voltage along the same

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925

















Publisher: Master Journals

route if dP/dV > 0. However, if dP/dV < 0, the PV will have moved array away from the MPP and the P&O algorithm will have flipped perturbation's the direction. [18].




Figure 6 P&O MPPT algorithm flow chart [16]

2.2 Method of Incremental Conductance (INC)

Method of Incremental Conductance (INC) technique is predicated on the fact that the PV's power incline is zero at the Maximum Power Point (MPP), with dP/dV = 0. Both information on current and voltage at the output of the PV array are necessary for the (INC) technique, just like for the P&O method. However, INC technique does not need calculation of PV

module power. The steady-state oscillations around the MPP of PV modules or arrays will theoretically disappear if the derivative of power with respect to voltage is null there. Nevertheless, due to the MPPT flow chart's digital implementation resolution, getting a null value of slope is challenging. Figure 7 illustrates how the INC MPPT controller tracks the MPP. [16].

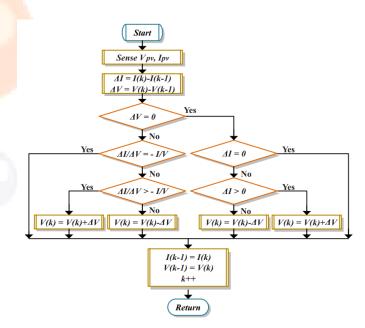


Figure 7 INC MPPT algorithm flow chart [16]

3. Design and Simulation of PV systems

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5. 823) (2022: 6. 041)

OCLC - 1242423883 METADATA IF - 6.925

















Publisher: Master Journals

3.1 A photovoltaic source model in Thevenin's equivalent circuit

Using the MATLAB Simulink toolbox, the Thevenin's equivalent circuit model for a PV source is created depends on the figure 8 and equations that describing the PV of Thevenin's model characteristics equivalent that calculated from equations (1) and (2), and modeled using suitable blocks from the Simulink library and codes of the m-file. The complete Simulink model of the PV module is shown in figure (9) and the (I-V), (P-V) characteristics are shown in figure (10).

 R_D

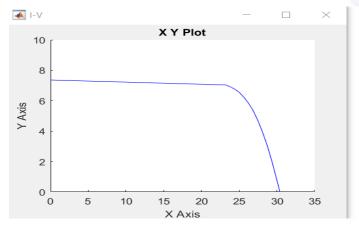


Figure 2.12 PV model with linearized diode [17]

$$V_{Th,i} = V_{x,i} + R_{D,i} \cdot \frac{I_{ph} \cdot R_{sh} - V_{x,i}}{R_{sh} + R_{D,i}}$$
 (1)

$$R_{\text{Th,i}} = R_s + \frac{R_{sh} \cdot R_{D,i}}{R_{sh} + R_{D,i}} \tag{2}$$

V_{Th} and R_{Th} stand for the equivalent voltage and resistance of Thevenin model respectively.


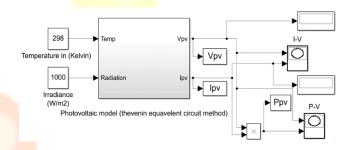


Figure photovoltaic model (thevenin equivalent circuit method).



VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925















Publisher: Master Journals

Figure 10 I-V and P-V for Thevenin's model at (25°C and 1000 W/m²).

From the above figure it is conclude that, the model's output characteristics curves match to the PV-MF165EB3 solar panel's characteristics referred to in table 1. The PV model operation characteristics are also studied under a variety of operating environments (temperature, irradiation) and physical qualities (series resistance, parallel resistance, ideality factor and so on).

Table 1 Module datasheet values and estimated parameters

Datasheet		Estimated				
Values		Parameters				
I_{sc}	7.36 A	I_{ph}	7.36 A			
V_{oc}	30.4 V	I_o	0.104 μΑ			
V_{mpp}	24.2 V	A	1.310			
I_{mpp}	6.83 A	R_s	0.251 ohm			
n_s	50	R_{sh}	1168 ohm			
Temperature coefficients						
K_i	0.057%	K_{ν}	-0.346%			

3.2 DC-DC Boost Converter Design

Figure (10) shows of MPPT stand-alone PV systems with resistive load that contain boost dc-dc converter's circuit. For steady-state

operation, its output voltage Vo is always greater than the input voltage V_i . The boost converter, especially in PV applications, not only amplifies the output PV voltage to the desirable level, but also conducts maximum power point tracking (MPPT) control. A components of converter are semiconductors (MOSFET and the diode), a filter composed of a capacitor, an inductor for energy storage, resistive load, and the PV panels (DC source). The MOSFET here is like a switch to variation the duty cycle (D), and transfer maximum power from the input source to load resistance.




Figure 10 PV systems with MPPT stand-alone and load resistor

3.3 Design of MPPT techniques

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925















Publisher: Master Journals

Two MPPT controller techniques have been chosen for comparison in this work; Perturb and observe (P&O) technique, and Incremental conductance (INC) technique.

A. Technique of perturb and observe (P&O)

The m-file MATLAB code is used to implement this algorithm, as represented in figure (11). The

photovoltaic voltage (Vpv) and current (Ipv) are inputs into the block, and the duty cycle (D) is the output. The initial duty cycle was selected to be (0.3) and when the result become close to the steady-state value the duty cycle step size is selected to be (1×10^{-3}) .

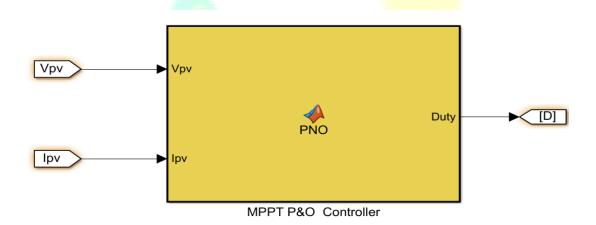


Figure 11 Block diagram of the P&O algorithm in Simulink.

B. Incremental conductance (INC) technique.

The m-file MATLAB code is used to implement this algorithm, as represented in figure (12). The photovoltaic voltage (Vpv) and current (Ipv) are inputs into the block, and the duty cycle (D)

is output. The initial duty cycle was selected to be (0.3) and when the result become close to the steady-state value the duty cycle step size is selected to be (1×10⁻³). For the same reason, the same initial duty cycle value (0.3) and duty cycle step size (1×10⁻³) are used, as well to compare the output results of the two algorithms.

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925















Publisher: Master Journals


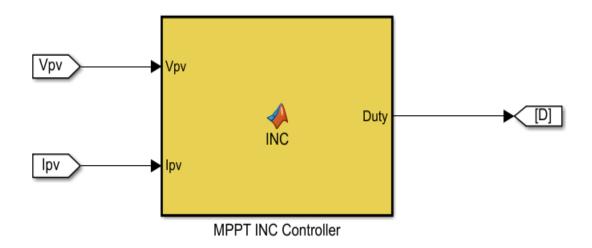


Figure 12 Block diagram of the INC algorithm in Simulink

4. Simulation and Results and Analysis

Thevenin's 4.1 Equivalent Model Characteristics

The same procedure above was used to calculate the characteristics of Thevenin's equivalent model of photovoltaic model source. I-V and P-V characteristics under variable irradiation and constant temperature are shown in figures (13) and (14) respectively. The solar irradiation varies between (400, 600, 800 and 1000 W/m2).

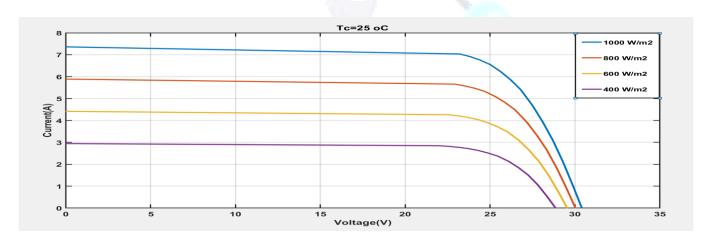

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925

















Publisher: Master Journals

Figure 13 I–V characteristics with variable irradiation - constant temperature

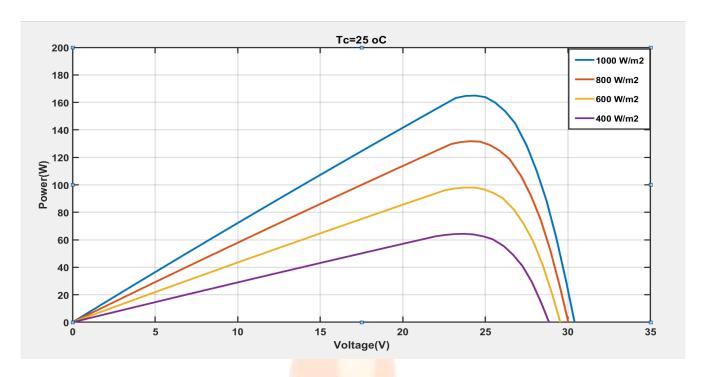


Figure 14 P–V characteristics with variable irradiation - constant temperature

The I–V and P–V characteristics under variable temperature and fixed irradiation are acquired in figure (15) and (16) respectively. The temperature changes between (25, 50 and 75°C), respectively, while the irradiation level remains constant at 1000 W/m².

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925

















Publisher: Master Journals

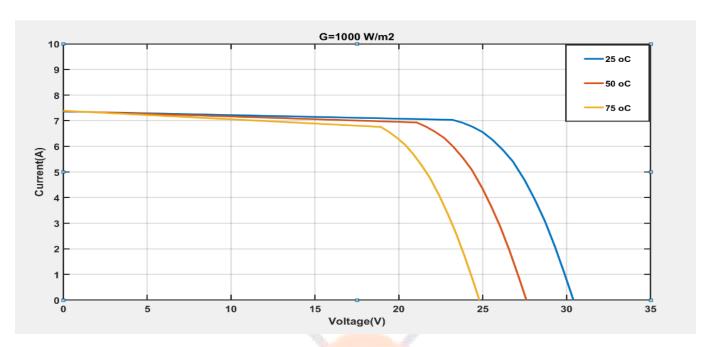


Figure 15 I–V characteristics with variable temperature - constant irradiation

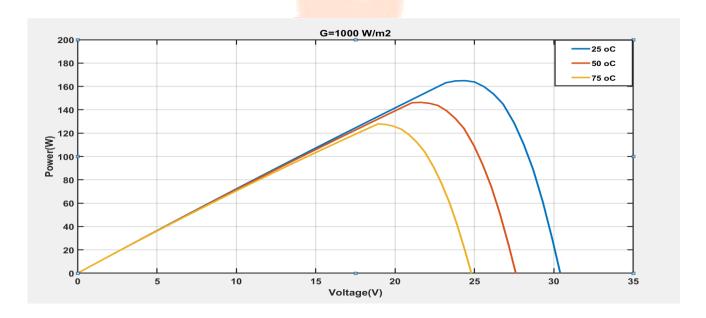


Figure 16 P–V characteristics with variable temperature - constant irradiation

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925















Publisher: Master Journals

4.2 Results from the System Simulation Using Thevenin's Equivalent Model source.

The PV model system was simulate based on Thevenin's equivalent model photovoltaic source model with P&O and INC algorithms, and boost converter to improve (MPPT) and the hence PV system performance. Figures (17) and (18) depict the block diagrams of the P&O and INC MPPT algorithms using the Thevenin's equivalent of photovoltaic source model.

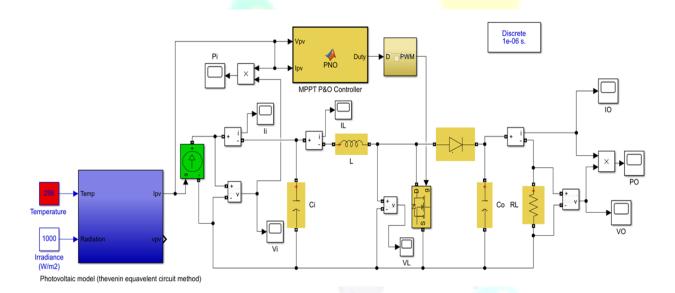


Figure 17 PV system with P&O MPPT algorithm

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925

















Publisher: Master Journals

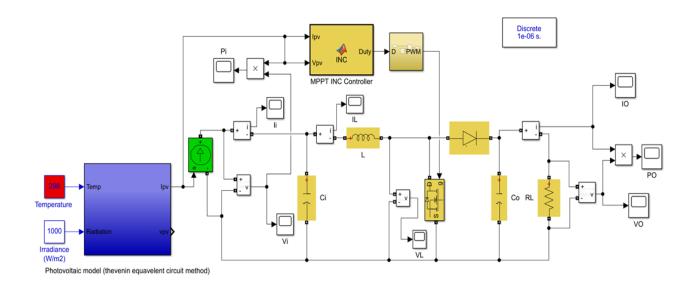


Figure 18 PV system INC MPPT algorithm

4.3 System Simulation at Constant Irradiation and Variable Temperature.

The system is tested when temperature changes while level of irradiance kept fixed at G=1000 W/m². A temperature was first 25°C, then it changed to 75°C after 0.4 seconds, and then back to 25°C after 0.62 seconds as shown in figure (19). Figures (20) and (21) shows characteristics of PV system for input and output power under constant solar level of irradiance ($G = 1000 \text{ W/m}^2$) and different temperature (T) conditions for P&O and INC MPPT algorithms.

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925

















Publisher: Master Journals

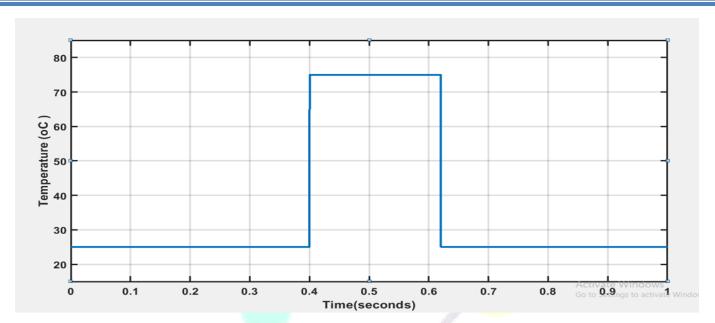


Figure 19 Temperature variation

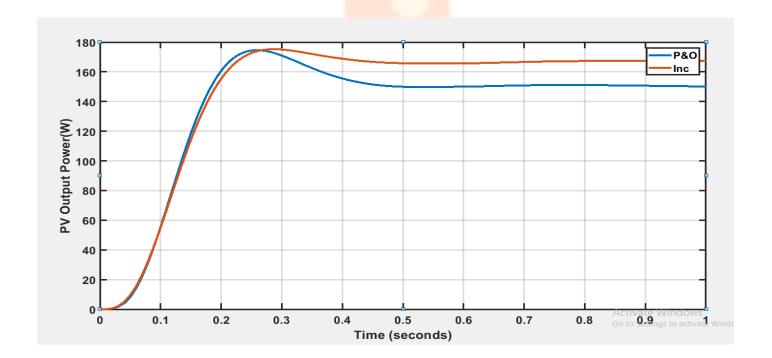


Figure 20 PV output power.

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925

















Publisher: Master Journals

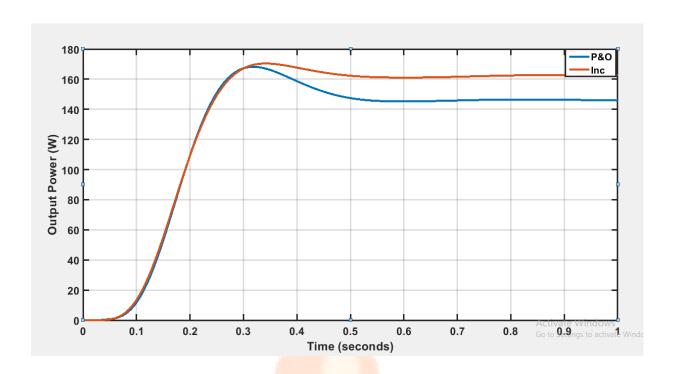


Figure 21 Converter output power.

System **Simulation** Constant 4.10.3 at Temperature and Variable Solar Irradiance Level.

The system was tested under different levels of irradiation while maintaining a constant temperature at 25°C. The insolation level was 1000 W/m² at first, then after 0.357 seconds, it

was changed to 600 W/m² and at 0.476 seconds, solar irradiation increased at 1000 W/m² again, shown in figure (22). Figures (23) and (24) shows characteristics of PV system for input and output power under constant temperature (T = 25°C) and variable solar irradiance level (G) conditions with P&O and INC MPPT algorithms.

19

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925















Publisher: Master Journals

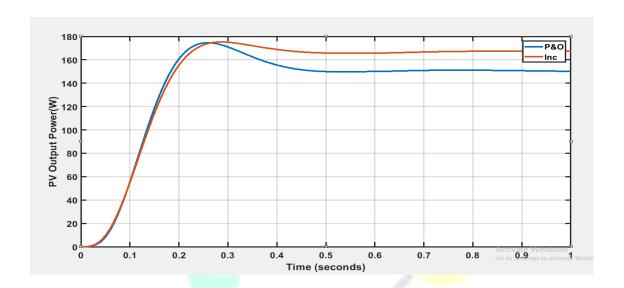


Figure (22) Changes in insolation levels.

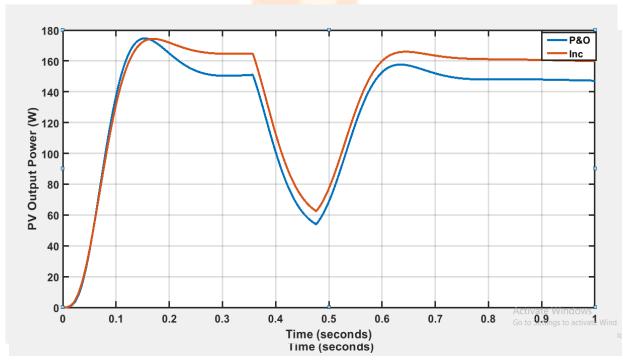


Figure 23 PV output power

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925

















Publisher: Master Journals

Figure 24 Converter output power.

Under the standard test conditions (25°C and 1000W/m²), the P&O and INC MPPT algorithms are tested and compared.. Table 1 shows the results of the comparison for Thevenin's

equivalent model using P&O and INC MPPT algorithms.

MPPT	PV system	P.P ripple	Stability	Absolute	Efficiency
	output	value (W)	Time (s)	Percentag	(%)
	power (W)		Time (s)	e error	
P&O	145.8	0.2	0.16	11 . 58 %	97.2
IC	160.9	0.22	0.125	2.5 %	98.29
		1			

Table 1 Comparison between P&O and IC algorithms for Thevenin's equivalent model.

5. Conclusion

In this paper, the INC MPPT algorithm tracks the maximum power point more accurate than the P&O algorithm, according to the simulation findings, and the INC method requires an addition sensor in comparison to the P&O algorithm, (INC) technique requires two variables to be sensed, whereas (P&O) approach only requires one. It has a faster response with less oscillation in both stable and transient conditions of unexpected

changes in the environment temperature and solar irradiation.

6. References

- 1. Al-Shahri, Omar al. "Solar A., et photovoltaic optimization energy methods. challenges and issues: A comprehensive review." Journal of Cleaner Production 284 (2021): 125465.
- 2. A.Chatterjee, A. Keyhani, "Thevenin's Equivalent of Photovoltaic Source Models

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925

















Publisher: Master Journals

- for MPPT and Power Grid Studies," IEEE Power & Energy Society General Meeting, pp. 1 – 7, 24-29 July, 2011, Detroit, Michigan.
- 3. Archer, Mary D., and Martin Andrew Green, eds. "Clean electricity from photovoltaics". Vol. 4. World Scientific, 2015.
- 4. Batushansky, Z., and A. Kuperman. "Thevenin-based approach to PV arrays maximum power prediction." 2010 IEEE 26th Convention of Electrical and Electronics Engineers in Israel. IEEE, 2010.
- 5. D. Sera, R. Teodorescu, J. Hantschel and M. Knoll,"Optimized Maximum Power Point Tracker for fast changing environmental conditions." 2008 IEEE International Symposium on Industrial Electronics, Cambridge, 2008, pp. 2401-2407.
- 6. D. Sera, T. Kerekes, R. Teodorescu and F. Blaabjerg,"Improved MPPT method for changing rapidly environmental conditions," 2006 IEEE International Symposium on Industrial Electronics, Montreal, Que., 2006, pp. 1420-1425.
- 7. Fangrui Liu, Yong Kang, Yu Zhang and Shanxu Duan, "Comparison of P&O and hill climbing MPPT methods for gridconnected

- PV converter," 2008 3rd IEEE Conference on Industrial Electronics and Applications, Singapore, 2008, pp. 804-807.
- 8. Hlaili, Manel, and Hfaiedh Mechergui, "Comparison of different **MPPT** algorithms with a proposed one using a power estimator for grid connected PV systems." international journal of photo energy 2016 (2016).
- 9. Hegazy Rezk, Ali M. Eltamaly. comprehensive comparison of different techniques for photovoltaic systems, Solar Energy", Volume 112, 2015, Pages 1-11.
- 10. H. P. Desai and H. K. Patel,"Maximum Power Point Algorithm in PV Generation: An Overview," 7th 2007 International Conference on Power Electronics and Drive Systems, Bangkok, 2007, pp. 624-630.
 - 11. Jubaer Ahmed, Zainal Salam, "An improved perturb and observe (P&O) maximum power point tracking (MPPT) algorithm for higher efficiency", Applied Energy, Volume 150, 2015, Pages 97-108.
 - 12. Joe-Air Jiang, Yu-Li Su, Kun-Chang Kuo, Chien-Hao Wang, Min-Sheng Liao, Jen-Cheng Wang, Chen-Kang Huang,

Volume 03 Issue 10-2022

22

VOLUME 03 ISSUE 10 Pages: 01-23

SJIF IMPACT FACTOR (2021: 5.823) (2022: 6.041)

OCLC - 1242423883 METADATA IF - 6.925

















Publisher: Master Journals

ChengYing Chou, Chien-Hsing Lee, Jyh-Cherng Shieh, "On a hybrid MPPT control scheme to improve energy harvesting performance of traditional two-stage inverters used in photovoltaic systems", Renewable and Sustainable Reviews, Volume 69, 2017, Pages 1113-1128

- 13. Li, Shaowu. "Linear equivalent models at the maximum power point based on variable weather parameters for photovoltaic cell." Applied Energy 182 (2016): 94-104.
- 14. M. Mantilla, G. Qui nones, C. Castellanos, J. Petit and G.Ord'o nez, "Analysis of maximum power point tracking algorithms in DC-DC boost converters for grid-tied photovoltaic systems,"IECON 2014 - 40th Annual Conference of the IEEE Industrial Electronics Society, Dallas, TX, 2014, pp. 1971-1976.
- 15. Mahmoud, Zouhaira Ben, Mahmoud Khedher. Hamouda, and Adel comparative study of four widely-adopted mppt techniques for pv power systems." 2016 4th International Conference on Engineering Information Control & Technology (CEIT). IEEE, 2016.
- 16. Nguyen, Binh Nam, et al. "A new maximum power point tracking algorithm for the photovoltaic system." power 2019 International Conference on System Science and Engineering (ICSSE). IEEE, 2019.

- 17. Pradhan, A, Prasad, S M, Karan, C," Energy Comparison of MPPT techniques for PV Systems", in IJESI Magazine, May 2019, PP 54-60.
- 18. Precup, R., Tariq Kamal, and Syed Zulqadar Hassan, "Solar Photovoltaic Power Plants". Springer: Singapore, 2019.
- 19. Ridha, Hussein Mohammed. "Parameters extraction of single and double diodes photovoltaic models using Marine Predators Algorithm and Lambert W function." Solar Energy 209 (2020): 674-693.
- 20. Singh, Omveer, and Shailesh Kumar Gupta. "A review on recent MPPT techniques for photovoltaic system." 2018 **IEEMA** Engineer Infinite Conference (eTechNxT). IEEE, 2018.
- 21. White, Sean, "Solar Photovoltaic Basics": A Study Guide for the NABCEP Associate Exam. Routledge, 2019.
- 22. Xiao, W "Photovoltaic power system":modeling, design, and control. John Wiley & Sons, 2017.
- 23. Zamora, A. Canchola, et al. "Efficiency based comparative analysis of selected classical MPPT methods." 2017 IEEE International Autumn Meeting on Power, Electronics and Computing (ROPEC). IEEE, 2017.

Volume 03 Issue 10-2022

23